




SUNSYNK BUSBAR

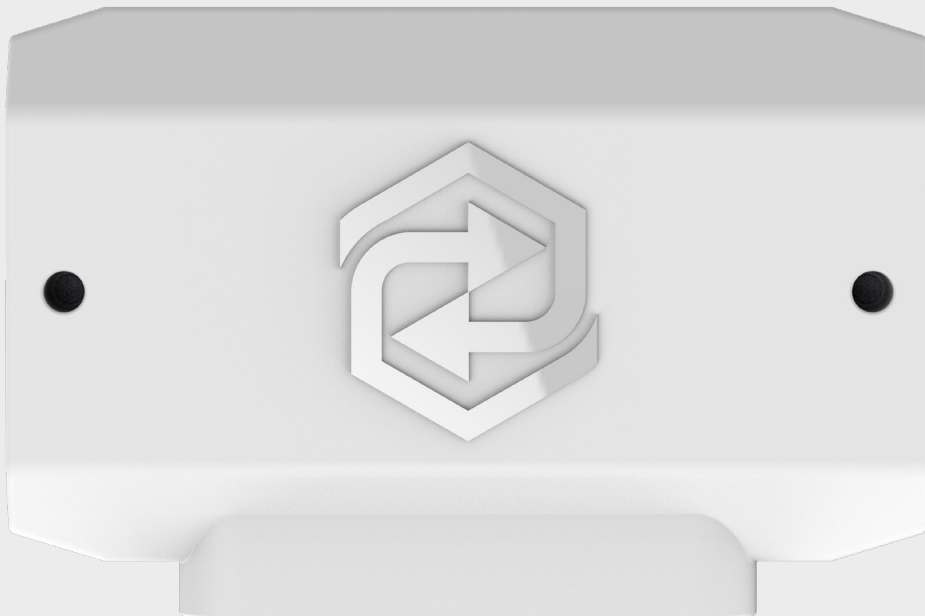

DATASHEET

SUNSYNK-BB-300

www.sunsynk.com
sales@sunsynk.com
customerservices@sunsynk.com

Model	SUNSYNK-BB-300
Power	
Voltage Range	9 - 50Vdc
Current Rating	800A
Connections	
Busbar	M8
Physical	
Enclosure Material	ABS
Enclosure Dimensions (H x W x D)	165 x 245 x 75mm
Unit Weight	1.8kg
Busbar Material	Tinned Copper
Busbar Dimensions (H x W)	8 x 30mm
Environmental	
Operating Temperature Range	-40°C - +60°C
Storage Temperature Range	-40°C - +60°C
Humidity	Max. 95% (Non-condensing)
Protection Class	IP22



CONTACT US

Call us: +44 151 832 4300 **Email us:** sales@sunsynk.com

HK Address: Room 702-704, 7/F Texwood Plaza,
6 How Ming Street, Kwun Tong, Kowloon, Hong Kong.

UK Address: Sunsynk, 17 Turnstone Business Park,
Mulberry Avenue, Widnes, Cheshire, WA8 0WN.

SA Address: Globaltech Sunsynk South Africa (Pty) Ltd,
Unit 2 Highview Boulevard, Ferndale 2194.

EU Address: Sunsynk EU, Henri Wijnmalenweg 8,
5657 EP Eindhoven, Netherlands.

GlobalTech Ltd

ena
energy networks
association



SGS

UK
CA CE

Powered by
SUN SYNK